


Series 2 Pro Handset Instructions

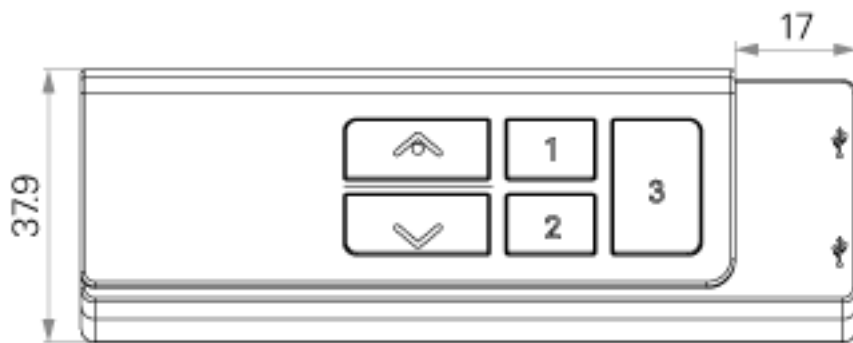

Note:

Title: Series 2 Pro Handset Instructions

Issue: 1

Issue Date: 11/06/2021


Author: EG


File Name: Series 2 Pro Handset Instructions Issue 1
11.06.2021

To view a step-by-step instruction video, please visit:

<https://vimeo.com/567017447>

or scan the code



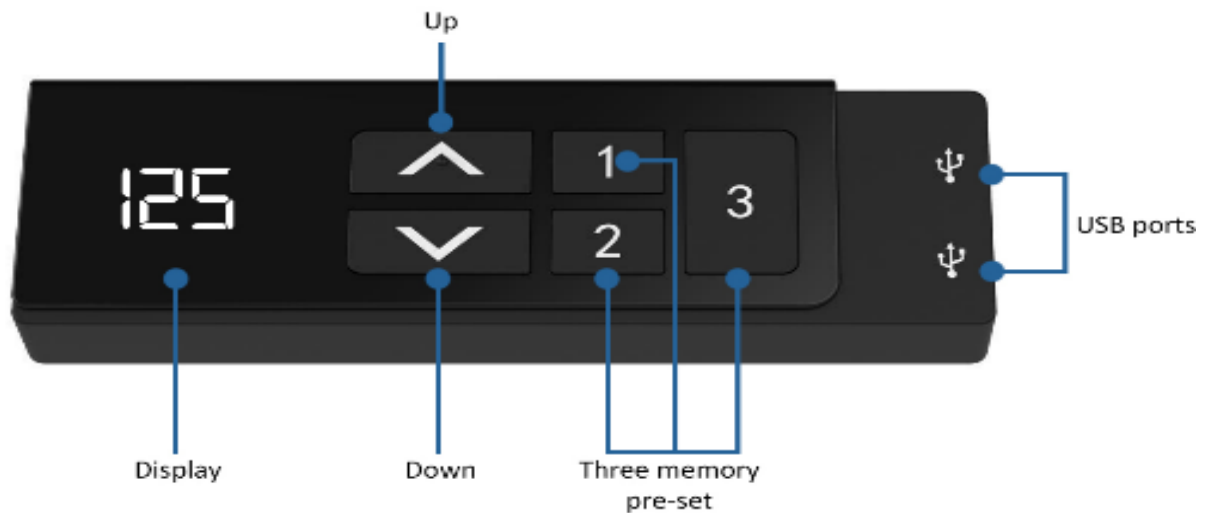

RESET OF DESK (to be done on first install and as needed after):

1. Press the "Up" and "Down" arrows until the frame has reached the lowest position;
2. A 'beep' will sound to indicate to you that the reset is complete. Your lifting system will then be fully operational.

Setting the memory function:

1. Move the desk up or down to the desired position;
2. Press "Up" and "1" for 5 seconds at the same time for Position 1.
3. Repeat the procedure to save the other positions (3 memory positions in total).

Setting the minimum height of the desk:

1. Use the "Up" and "Down" buttons to move the desk-top height to the desired height you wish to set as the minimum.
2. Press "Up" and "Down" at the same time for only one second (no longer or desk may go into reset mode). Release the "Up" button but continue to hold the "Down" button and simultaneously press the "Up" button three times after which you should hear a single 'beep'.
3. After completing step 2 the minimum height will have been set on the desk system. The desk will now be unable to be moved lower than this height.

Unsetting (removing) minimum height of the desk:

1. Use the "Down" button to move the desk-top height to the height previously set as minimum (If you are unsure what the minimum height is, move the desk-top to the lowest height it will go).
2. Press "Up" and "Down" at the same time for only one second (no longer or desk may go into reset mode). Release the "Up" button but continue to hold the "Down" button and simultaneously press the "Up" button three time after which you should hear a single 'beep'.
3. After completing step 2 the minimum height will have been removed on the desk system. The desk will now be able to move lower than this height. You will know this setting is removed if the desk moves past the minimum to the lowest possible height.

Setting the maximum height of the desk:

1. Use the "Up" and "Down" buttons to move the desk-top height to the desired height you wish to set as the maximum.
2. Press "Up" and "Down" at the same time for only one second (**no longer or desk may go into reset mode**). Release the "Down" button but continue to hold the "Up" button and simultaneously press the "Down" button three times after which you should hear a single 'beep'.
3. After completing step 2 the maximum height will have been set on the desk system. The desk will now be unable to be moved higher than this height.

Unsetting (removing) maximum height of the desk:

1. Use the "Up" and "Down" buttons to move the desk-top height to the height previously set as maximum (If you are unsure what the maximum height is, move the desk-top to the tallest height it will go).
2. Press "Up" and "Down" at the same time for only one second (**no longer or desk may go into reset mode**). Release the "Down" button but continue to hold the "Up" button and simultaneously press the "Down" button three time after which you should hear a single 'beep'.
3. After completing step 2 the maximum height will have been removed on the desk system. The desk will now be able to move higher than this height. You will know this setting is removed if the desk moves past the maximum to the tallest possible height.

Bluetooth Installation:




1. Insert the dongle into the backside of the control panel.
2. Download and open the "Stand Up Pls" app, then follow the next steps.
3. Fill in your personal data.
4. Then press "→" to scan for devices.
5. Next, select the dongle in the app that is placed in the back of the control panel. The name is printed on the back of the dongle (Note, only one dongle can be connected per tablet/telephone).




6. Then choose the number of kcals you want to burn per hour or create your own program.
7. All data will be saved. You can find this information by clicking on the 'graph icon' button on the right corner.
8. Three images are shown on the next page, which indicate which information is stored in the application.




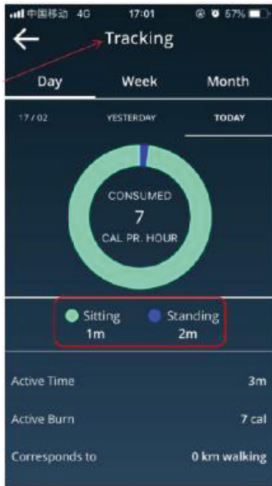

Monitoring Sit/Stand


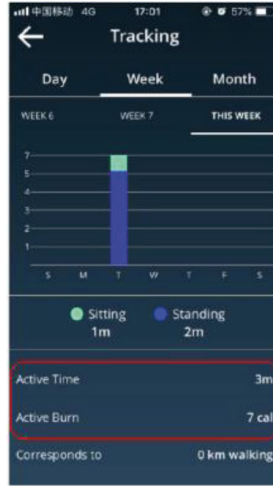


Activity and burned kcals

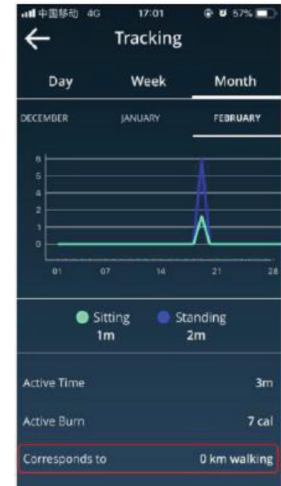

Correspond with number of km walked

9. Settings can be changed by clicking on the 'settings' button.

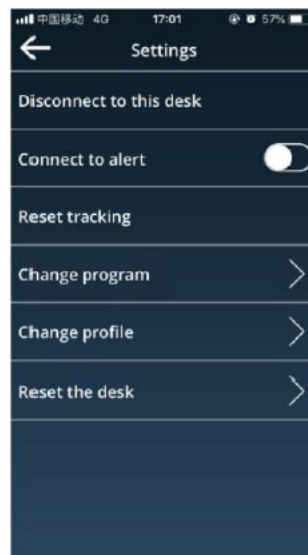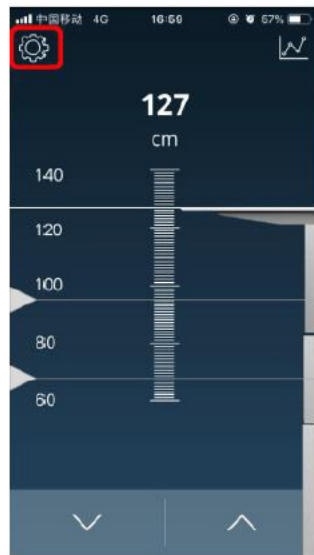


CM or INCH settings:

1. Press "1", "2" & "3" together for 5 seconds;
2. Then "Cl" will flash on the display;
3. Press "1" for CM or press "2" for INCH.

To view a step-by-step instruction video, please visit:

<https://vimeo.com/567017447>

or scan the code



GOSTAND
SIT STAND DESKS

UK:

Email: info@gostand.co.uk

Tel: 0800 368 9668

Ireland:

Email: Info@gostand.ie

Tel: 04890767076